


# SCHEMATIC DIAGRAM

B001 PB-130

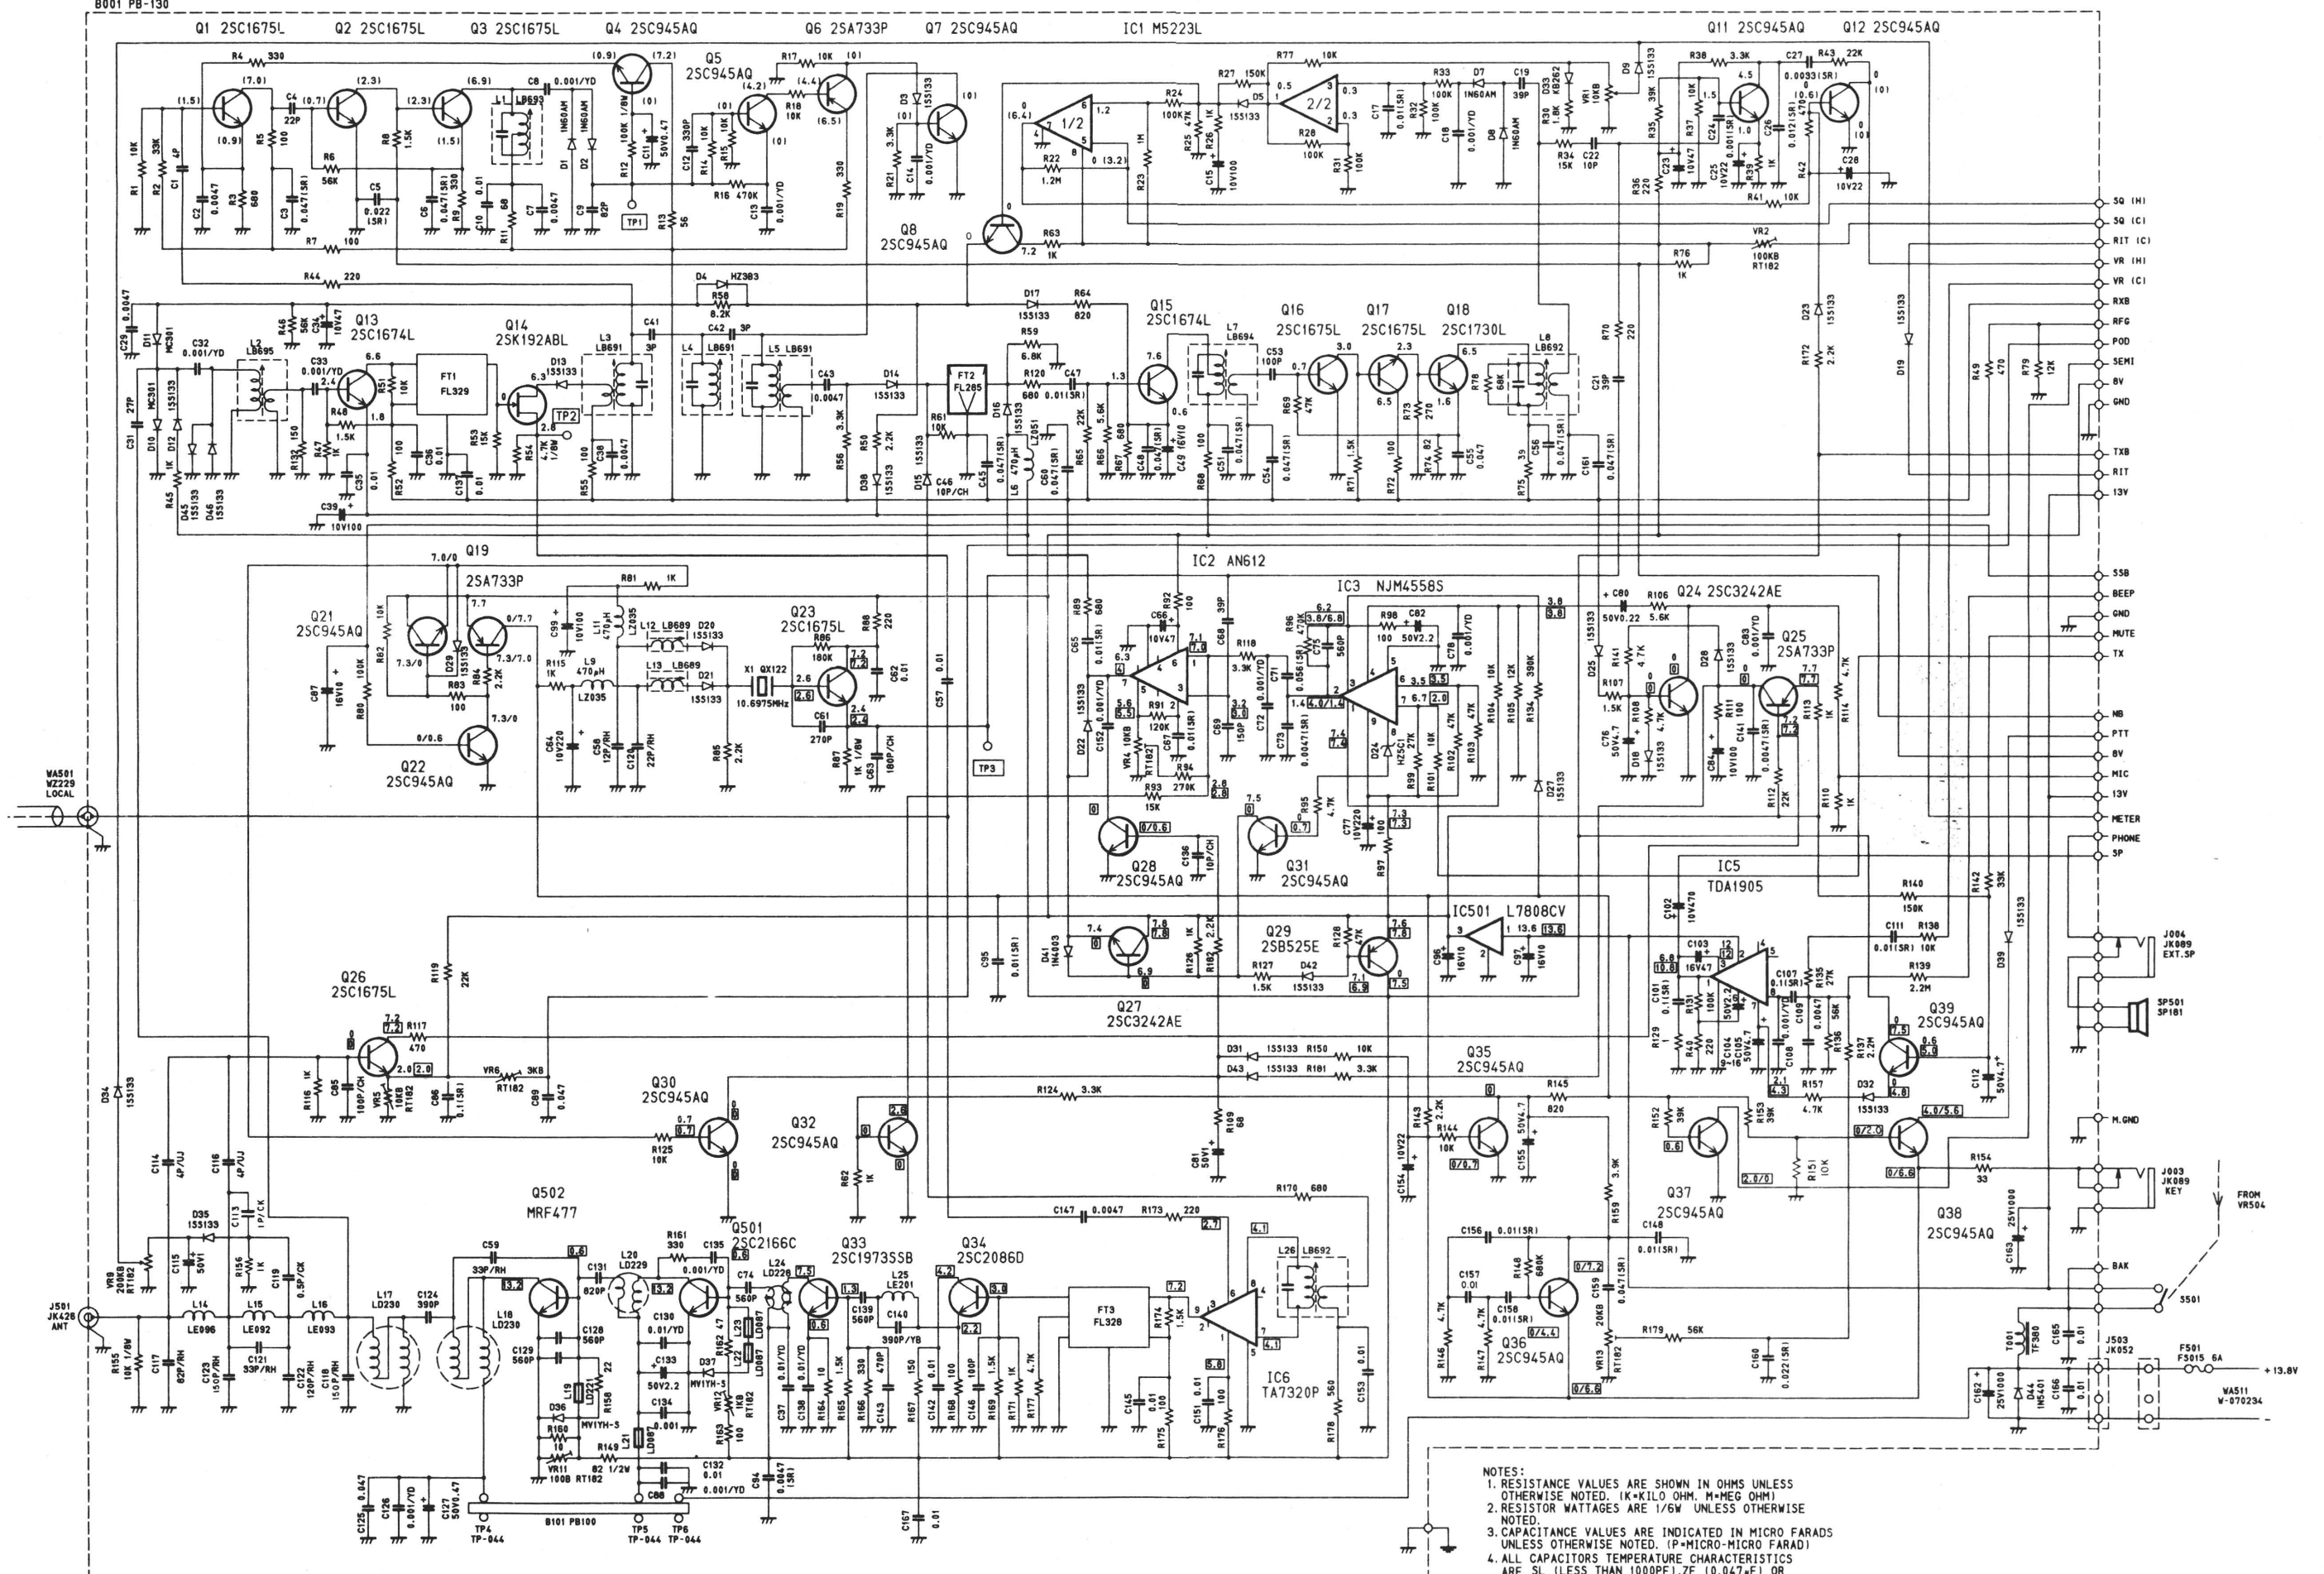

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
  2. RESISTOR WATTAGES ARE 1/6W UNLESS OTHERWISE NOTED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
  4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SL (LESS THAN 1000PF), ZF (0.047µF) OR YF (0.001µF-0.039µF) UNLESS OTHERWISE NOTED.
  5. DC VOLTAGE IN □ SHOWS TX CONDITION. (SSB/CW)
  6. DC VOLTAGE IN ○ MARK SHOWS RX CONDITION. (SSB/CW)
  7. DC VOLTAGE IN | SHOWS RX CONDITION UNDER OPERATION OF EACH FUNCTION.